

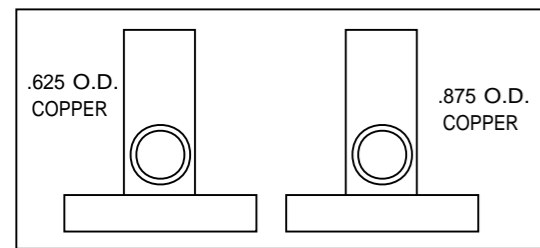


RITE-TEMP MFG.

MODEL: RTR-2403 EVAPORATOR

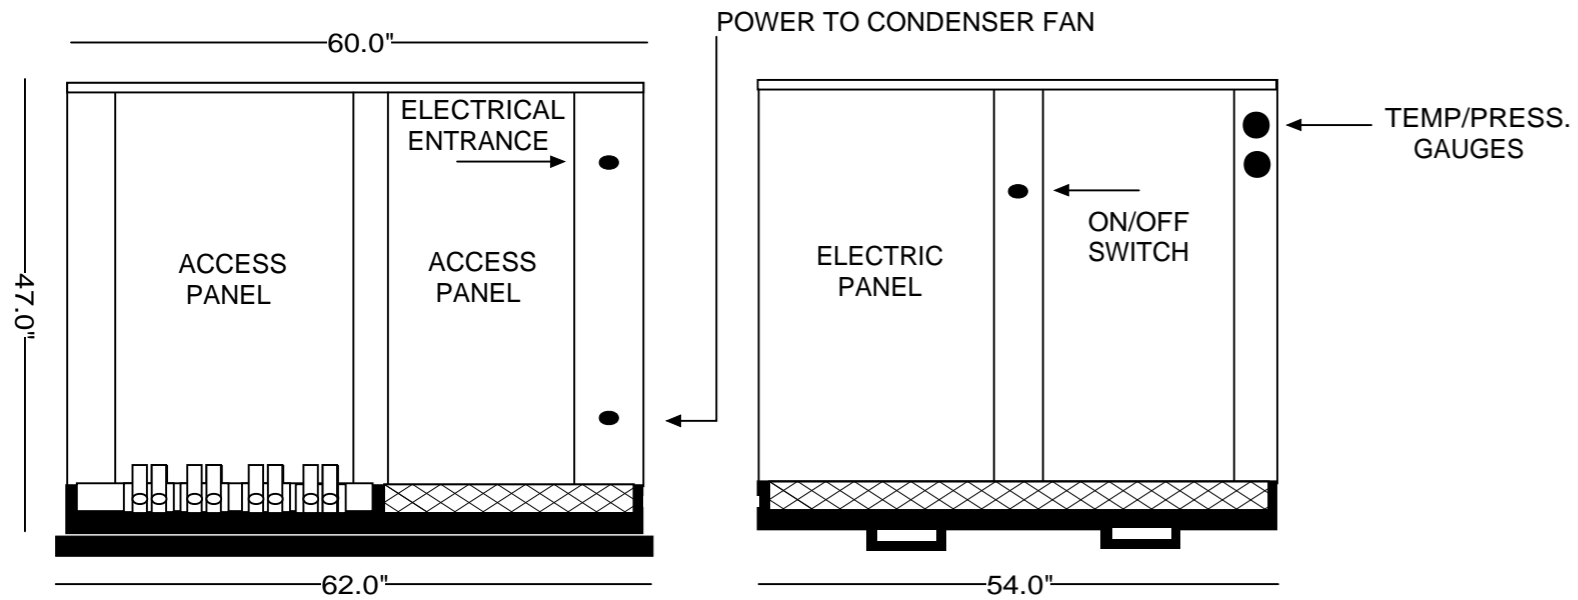




REFRIGERATED VALVE OUTLET SIZE

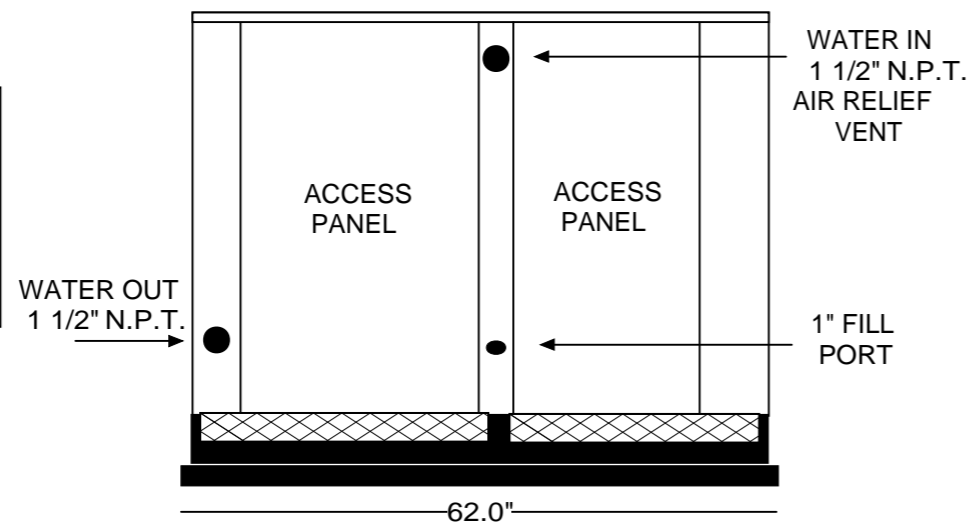

RITE-TEMP MFG.

MODEL: RTR-2403 CONDENSER

Required - (2)

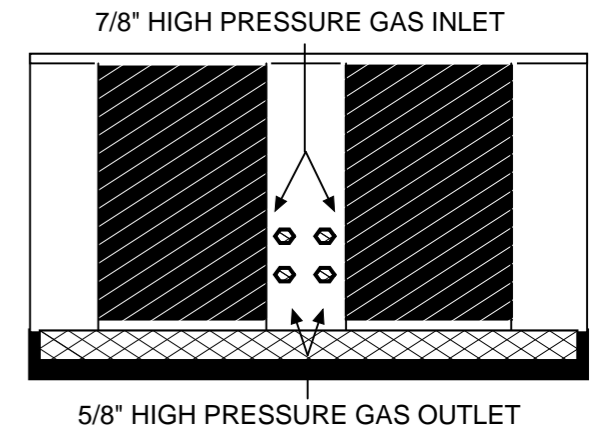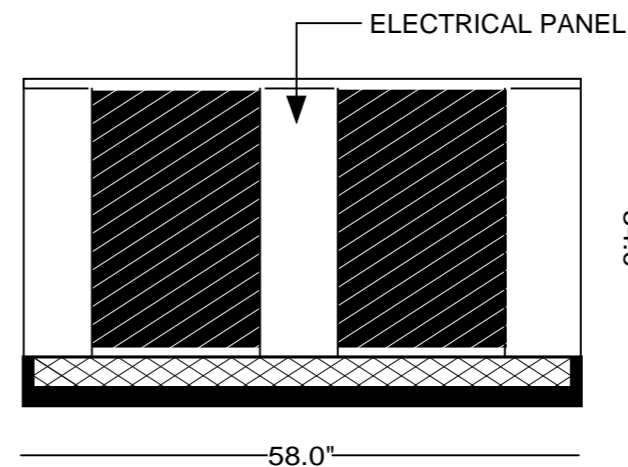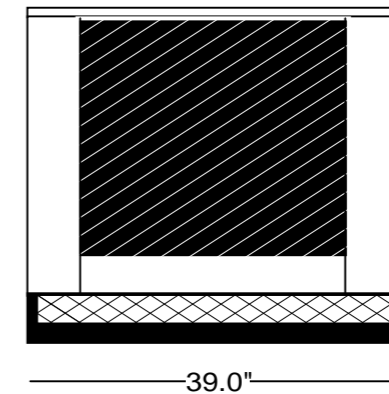

SPECIFICATIONS:

- 288,000 BTU/HR heat removal - 95F degree ambient, 45F degree water out.
- Electrical: 208-230 / 60/ 3Ph., 24 volt electrical panel.
- Run Load 97.9 Amps.
- Minimum Circuit Ampacity: 103; Maximum Circuit Ampacity: 185.
- ETL/CSA Laboratory Approved: ETL # 63122 & CANCSA NO. 236.
- (2) 40 gallon, 16 gage, 304 stainless steel closed evaporator tank with coil inside.
- 1.5 HP water pump: 25-30 GPM, 30-35 PSI.
- Low ambient start-up package (standard).
- R422D Refrigerant.
- Analog water temperature and pressure gauges.
- Air-cooled condenser.
- Cabinet: 18 and 20 GA Phos coat galvanized steel finished with polyester powder coat.
- Base frame: 1/8 inch angle and channel iron.
- Multi-compressor design: (4) 6 ton Copeland Hermetic Scroll (5 year warranty).
- Independent dual compressor operation for staged loads.
- Approximate crated weight: 2800 LBS.
- Condenser dimensions: 2 @ 39" wide X 58" deep X 34" tall.
- Evaporator dimensions: 54" wide X 60" deep X 47" tall.